


Handsender Layout

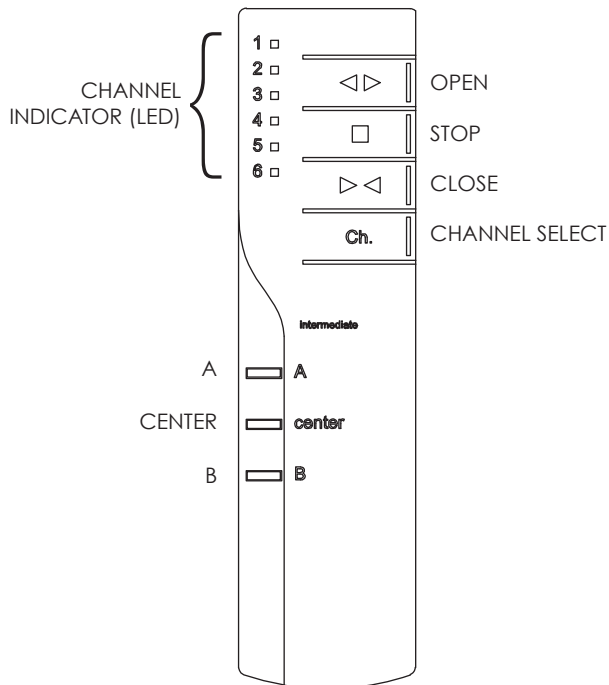

Programming Tumo Drapery Motors

Instructions

For all following programming commands, the motor must be placed into "Pairing Mode".

Enter Pairing Mode = Disconnect power to the motor for 30 seconds, then reconnect. Motor stays in program mode for 90 seconds. For motors already paired, select the appropriate channel and hold STOP for approximately 5 seconds until the motor jogs.

Pair Handsender to Motor / Learn Channel

Expected Response:

Select desired channel, then hold Open and Close.

Ch. → ◀ ▶ + ▶ ▶

- The handsender will give a slow blink
 - After 3-5 seconds, the motor will jog
 - Motor will now work on this channel
- Note: Each motor can learn up to 4 channels

Delete Channel from Motor

Select desired channel, then hold Stop and Open.

Ch. → ◻ + ▶ ▶

- The handsender will give a slow blink
- After 3-5 seconds, the motor will jog
- Motor will no longer respond to this channel

Delete All Channels

Hold Stop and Close.

◻ + ▶ ▶

- The handsender will give a slow blink
- After 3-5 seconds, the motor will jog
- Motor will no longer respond to any channel

Reverse Motor Direction

Hold A + B.

A + B

- The handsender will give a slow blink
- After 3-5 seconds, the motor will jog
- Travel direction is now reversed

Toggle Touch Control (On/Off)

Motor must be in Pairing Mode

Turn Off: Hold Center and B.


Center + B

Turn On: Hold Center and A.

Center + A

- The handsender will give a slow blink.
- After 3-5 seconds, the motor will jog.
- Motor will no longer respond via Touch Control.

Wall Switch Layout

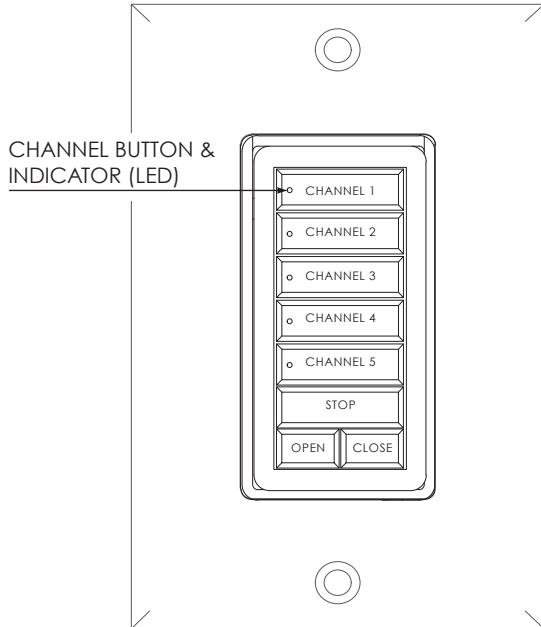

Instructions


For all following programming commands, the motor must be placed into “program mode”.

Enter Program Mode = Disconnect power to the motor for 30 seconds, then reconnect power to the motor. Motor stays in program mode for 90 seconds.

Pair Handsender to Motor / Learn Channel

Expected Response:

Select desired channel, then hold Open and Close.



- The wallswitch will give a slow blink
- After 3-5 seconds, the motor will jog
- Motor will now work on this channel
- Note: Each motor can learn up to 4 channels

Delete Channel from Motor

Select desired channel, then hold Stop and Open.



- The wallswitch will give a slow blink
- After 3-5 seconds, the motor will jog
- Motor will no longer respond to this channel

Reverse Motor Direction

Select desired channel, then hold Stop and Close.



- The wallswitch will give a slow blink
- After 3-5 seconds, the motor will jog
- Travel direction is now reversed